

SANYO

No.2059C

LB1646

VTR Reel Motor Controller

The LB1646 is a bidirectional motor driver IC. Since it has a 2-input logic circuit and performs the functions of bidirectional driving and braking, it is capable of direct driving 6V, 9V, 12V motors. The output voltage can be varied by using an external Zener diode and the output current can be limited at the time of overload.

Features


- 2-input logic can be used to exercise control of bidirectional driving and braking.
- Input connectable direct to MOS LSI.
- Output voltage variable by use of external Zener diode.
- On-chip output current limiter.
- On-chip minimum output voltage control circuit.
- Variable output current limit slope.
- On-chip circuit to turn ON/OFF the output current limit function.

Absolute Maximum Ratings at $T_a = 25^\circ\text{C}$


				unit
Maximum Supply Voltage	V_{CC} max		25	V
Input Voltage	V_{IN1}	V_{IN1}, V_{IN2}, INH pin	-0.3 to V_{CC}	V
	V_{IN2}	V_L, R_R pin	-0.3 to V_{ref}	V
Output Current	I_{OUT}		± 1.6	A
Allowable Power Dissipation	P_d max	No heat sink	3.6	W
Operating Temperature	T_{opr}		-25 to $+75$	$^\circ\text{C}$
Storage Temperature	T_{stg}		-55 to $+125$	$^\circ\text{C}$

Allowable Operating Conditions at $T_a = 25^\circ\text{C}$

			unit
Supply Voltage	V_{CC}	7 to 25	V

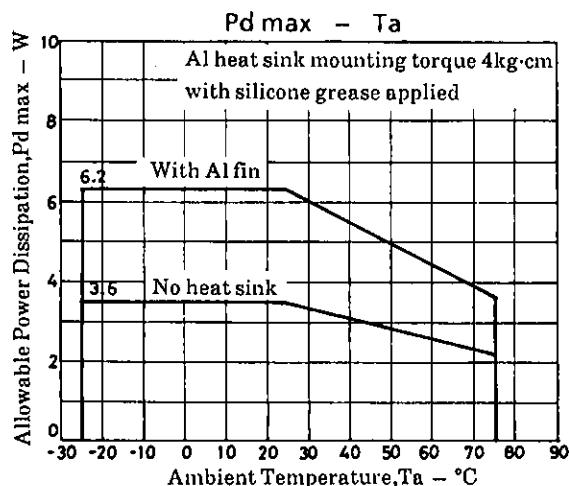**Package Dimensions 3023A**

(unit: mm)

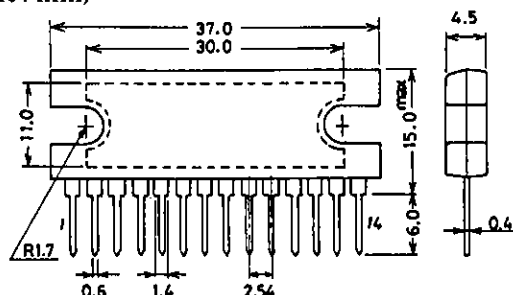
**SANYO Electric Co., Ltd. Semiconductor Business Headquarters**

TOKYO OFFICE Tokyo Bldg., 1-10, 1 Chome, Ueno, Taito-ku, TOKYO, 110 JAPAN

22095TH(KOYO)/93094TH/8070TS/9047TA, TS No.2059-1/4

Electrical Characteristics at Ta=25°C, VCC=12V			min	typ	max	unit
Input Threshold Voltage	Vth	VIN1, VIN2, INH	1.0	1.4	2.0	V
Input Current	IIN	VIN1, VIN2, INH = 10V	0.10	0.17	0.25	mA
Output Voltage	VO	IOUT=100mA, VZ=7.0V	6.0	6.8	7.5	V
Output Leakage Current	IOL	VIN1, VIN2=0V			1.0	mA
Current Dissipation	ICC	VIN1, VIN2=0V	9.5	14.5	19	mA
Saturation Voltage (Upper)	Vsat1	IOUT=300mA			2.2	V
		IOUT=500mA			2.3	V
Saturation Voltage (Lower)	Vsat2	IOUT=300mA			0.5	V
		IOUT=500mA			0.65	V
Limit Voltage	VL	VL=3.0V	2.8	3.2	3.6	V
VZ Flow-out Current	IVZ	VZ=7V	1.1	1.6	2.1	mA
Current Limit Start Voltage	VRCD	VO=9V, RS=2.0Ω, RR=1V, VCC=15V	425	460	493	mV
Current Limit Start Voltage	ΔVRCD	VO=9V to 4V, RCD=2.0Ω, RR=1V, VCC=15V	32	42	52	mA
Reference Voltage	Vrdf	Iref=500μA	5.8	6.2	6.6	V

Equivalent Circuit Block Diagram

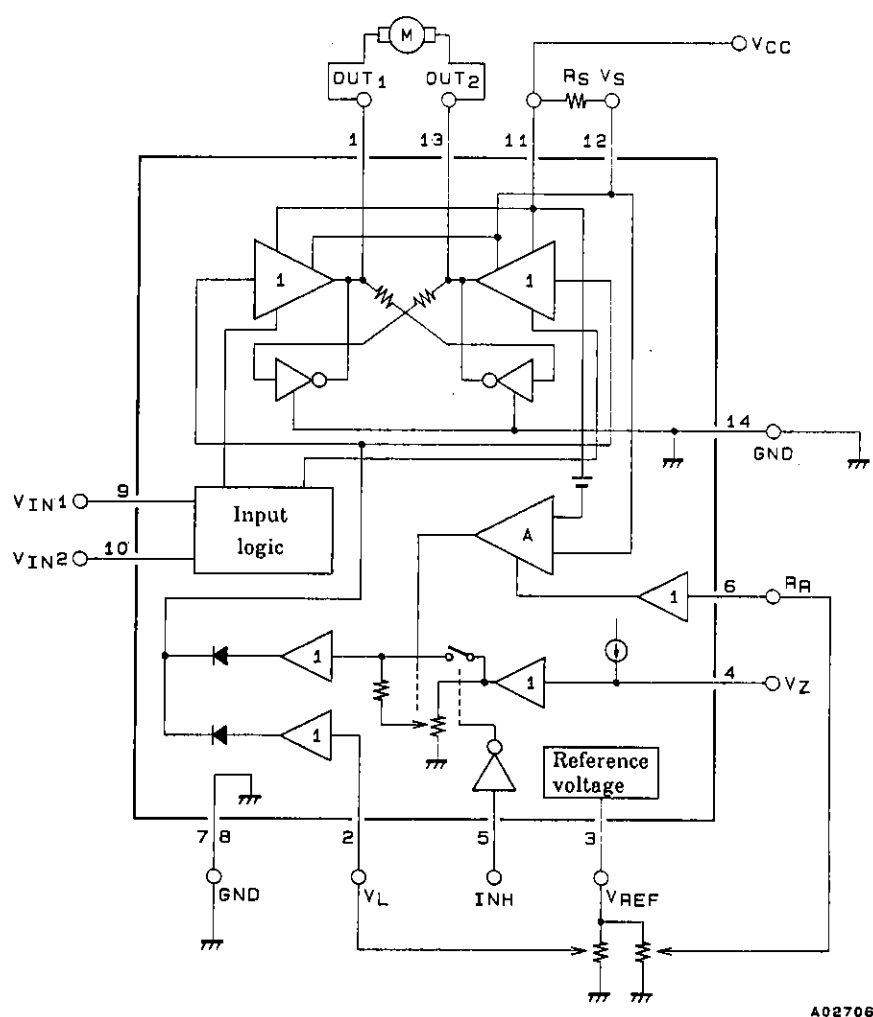


Pin Functions

Pin No.	Pin Name	Function
1	OUT1	Output pin1. When V_{IN1} is brought to H level, Out1 is at a high voltage level relative to OUT2.
2	V_L	Minimum voltage control pin. Controls a minimum value of output voltage at the current control mode.
3	V_{REF}	Reference voltage output pin. Regulated power source for supplying voltage for V_L , R_R .
4	V_Z	Zener pin. Controls the output voltage. The voltage on pin is almost equal to the output voltage.
5	INH	Current free inhibit pin. When this pin is brought to H level, the output current is limited by a preset value.
6	R_R	Slope control pin. Controls the output current V_s . Output voltage slope at the current control mode.
7, 8	GND	GND. Control section GND.
9	V_{IN1}	Input pin1. When brought to H level, output pin OUT1 is at a high voltage level relative to OUT2 (Refer to Logic Diagram).
10	V_{IN2}	Input pin2. When brought to H level, output pin OUT2 is at a high voltage level relative to OUT1 (Refer to Logic Diagram).
11	V_{CC}	Power source voltage supply pin.
12	V_s	Current detect pin. By connecting a resistor across V_s and V_{CC} and setting its value, a limit start current can be obtained. Limit start current = V_{OL}/R_s .
13	OUT2	Output pin2. When V_{IN2} is brought to H level, OUT2 is at a high voltage level relative to OUT1.
14	GND	GND. Power section GND. Connected to pins 8, 9 internally.


Logic Section Truth Table

V _{IN1}	V _{IN2}	OUT1	OUT2
0	0	L	L
1	0	H	L
0	1	L	H
1	1	L	L

Sample Application Circuit

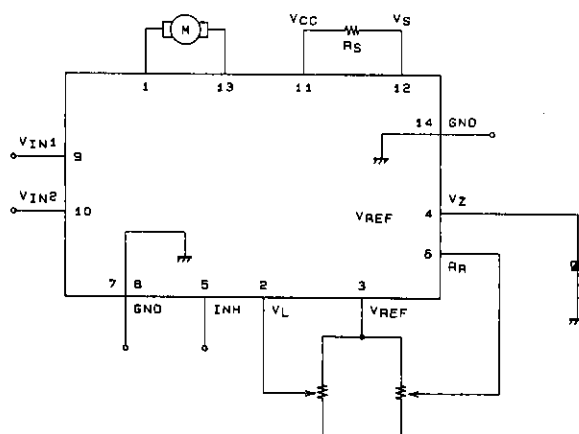

Sample Application Characteristics Circuit

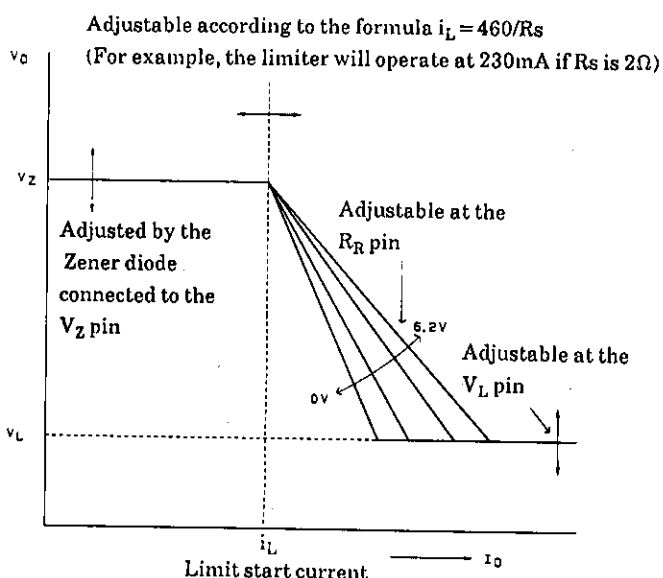

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
 - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use:
 - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.

This datasheet has been download from:

www.datasheetcatalog.com

Datasheets for electronics components.