


6427525 N E C ELECTRONICS INC 05E 22678 D
BIPOLAR ANALOG INTEGRATED CIRCUIT
 μ PC1212C

T-74-05-01

AUDIO POWER AMPLIFIER**DESCRIPTION**

The μ PC1212C is a silicon monolithic integrated circuit designed for an audio power amplifier used in a portable radio receiver or a portable cassette tape recorder which works at 6-volt power supply.

The μ PC1212C is encapsulated in an 8-pin dual in line plastic package with a tab.

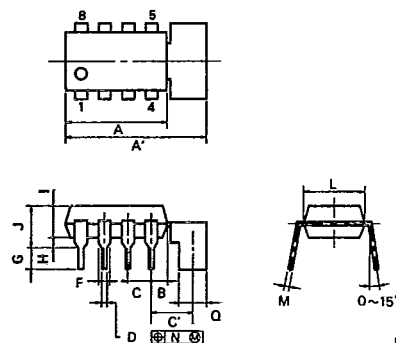8 PIN PLASTIC DIP WITH TAB (300 mil)

PCT-100-3208


ITEM	MILLIMETERS	INCHES
A	12.70 MAX.	0.500 MAX.
A'	14.50 MAX.	0.571 MAX.
B	2.54 MAX.	0.100 MAX.
C	2.54 (T.P.)	0.100 (T.P.)
C'	3.65	0.144
D	0.50 ± 0.10	0.020 ± 0.004
F	1.1 MIN.	0.043 MIN.
G	3.5 ± 0.2	0.138 ± 0.012
H	0.51 MIN.	0.020 MIN.
I	4.31 MAX.	0.170 MAX.
J	5.08 MAX.	0.200 MAX.
L	6.4	0.252
M	0.30 ± 0.08	0.012 ± 0.003
N	0.25	0.01
Q	2.62 ± 0.50	0.103 ± 0.020

NOTE

1) Each lead centerline is located within 0.25 mm (0.01 inch) of its true position (T.P.) at maximum material condition.

FEATURES

- High output power. $P_o = 1$ W (TYP.) at $V_{CC} = 6$ V, $R_L = 4 \Omega$, T.H.D. = 10 %
- Wide operating voltage range. $V_{CC} = 3.5$ to 6 to 9 V
- High ripple rejection ratio. R.R.R. = 55 dB (TYP.)
- Soft clipping waveform.
- Have a muting circuit so that no shock noise at power supply switch on and off.
- Have a terminal to reject interference noise in strong electric field. (pin 2)

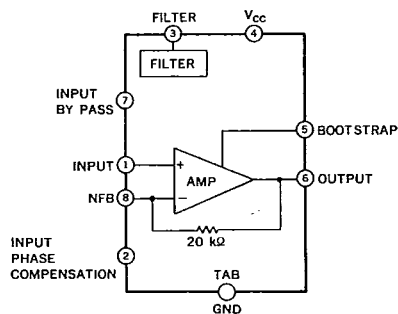BLOCK DIAGRAM**CONNECTION DIAGRAM**

No.	CONNECTION	No.	CONNECTION
1	INPUT	5	BOOTSTRAP
2		6	OUTPUT
3	FILTER	7	FILTER
4	V_{CC}	8	N. F. B.
TAB	GND		

μ PC1212C

6427525 N E C ELECTRONICS INC

05E 22679 D

ABSOLUTE MAXIMUM RATINGS ($T_a = 25^\circ\text{C}$)

Supply Voltage	V_{CC1}	(No Signal)	11	V
Supply Voltage	V_{CC2}	(Operating)	9	V
Allowable Power Dissipation	P_d		2.4	W
Operating Temperature	T_{opt}		-20 to 70	$^\circ\text{C}$
Storage Temperature	T_{stg}		-40 to 150	$^\circ\text{C}$

T-74-05-01

* 50 x 50 x 0.035 mm³ copper heat sink on P.C.B.RECOMMENDED CONDITIONS ($T_a = 25^\circ\text{C}$)

Supply Voltage	$V_{CC} = 3.5$ to 6 to 9 V
Load Impedance	$R_L = 4 \Omega$

ELECTRIC CHARACTERISTICS ($T_a = 25^\circ\text{C}$)

(Refer to the test circuits $V_{CC}=6$ V, $R_L=4 \Omega$, 50 X 50 X 0.035 mm³ copper heat sink on P.C.B. unless otherwise specified)

CHARACTERISTIC	SYMBOL	MIN.	TYP.	MAX.	UNIT	CONDITION
Quiescent Circuit Current	I_{CC}	8	15	25	mA	No Signal
Open Loop Voltage Gain	A_{VO}	55	65		dB	$P_O=0.25$ W, $f=1$ kHz
Voltage Gain (Closed Loop)	A_V	41	45 34	48	dB	$R_f=100 \Omega$ $f=1$ kHz $R_f=360 \Omega$ $f=1$ kHz
Output Power	P_O	0.7	2.4 1.3 1.0 0.54 0.41 0.22		W	T.H.D.=10 % $f=1$ kHz, $R_f=100 \Omega$ $V_{CC}=9$ V, $R_L=4 \Omega$ $V_{CC}=9$ V, $R_L=8 \Omega$ $V_{CC}=6$ V, $R_L=4 \Omega$ $V_{CC}=6$ V, $R_L=8 \Omega$ $V_{CC}=4$ V, $R_L=4 \Omega$ $V_{CC}=4$ V, $R_L=8 \Omega$
Input Sensitivity	$V_i(rms)$		16.4 47.4		mV	$P_O=1$ W $R_L=4 \Omega$, $f=1$ kHz $R_f=100 \Omega$ ($A_V=45$ dB) $R_f=360 \Omega$ ($A_V=34$ dB)
Input Sensitivity	$V_i(rms)$		2.5 8.9		mV	$P_O=50$ mW $R_L=4 \Omega$, $f=1$ kHz $R_f=100 \Omega$ ($A_V=45$ dB) $R_f=360 \Omega$ ($A_V=34$ dB)
Total Harmonic Distortion	T.H.D.		0.4	1.5	%	$P_O=0.25$ W
Output Noise Voltage	NL		0.2	0.8	mV _{r.m.s.}	$R_G=0$
Supply Voltage Rejection Ratio	S.V.R.	40	55		dB	$R_G=0$, $f_{ripple}=100$ Hz $V_{ripple}=0.3$ V _{r.m.s.}
Input Impedance	R_i	10	20		k Ω	

NOTE: In case that only a TYP. value is specified, this specification is for helping to design.


μ PC1212C
6427525 N E C ELECTRONICS INC

05E 22680 D

TEST CIRCUIT

T-74-05-01

Fig. 1 TEST CIRCUIT

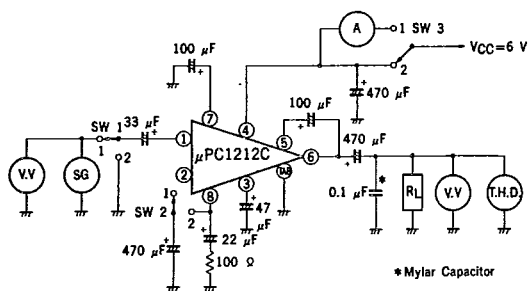


SWITCH POSITION

SWITCH		SW1	SW2	SW3
ITEM				
Circuit Current	I_{CC}	.2	1	1
Open Loop Voltage Gain	A_{VO}	1	2	2
Voltage Gain	A_V	1	1	2
Output Power	P_O	1	1	2
Total Harmonic Distortion	T.H.D.	1	1	2
Output Noise Voltage	NL	2	1	2

TYPICAL APPLICATION

Fig. 2 SINGLE OPERATION

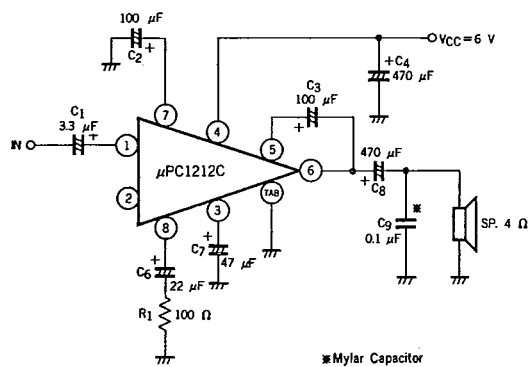

6427525 N E C ELECTRONICS INC

 μ PC1212C
05E 22681 D

Fig. 3 BTLO OPERATION

T-74-05-01


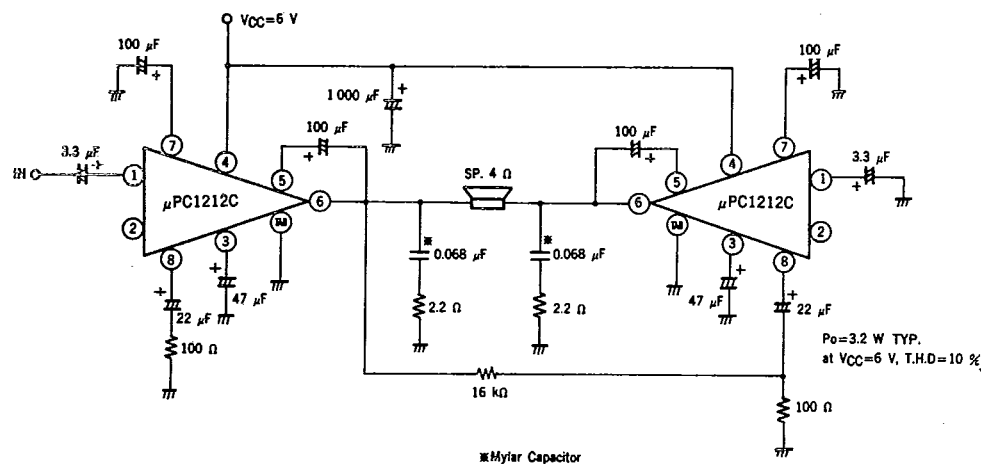


Fig. 4 SINGLE OPERATION WITHOUT BOOTSTRAP

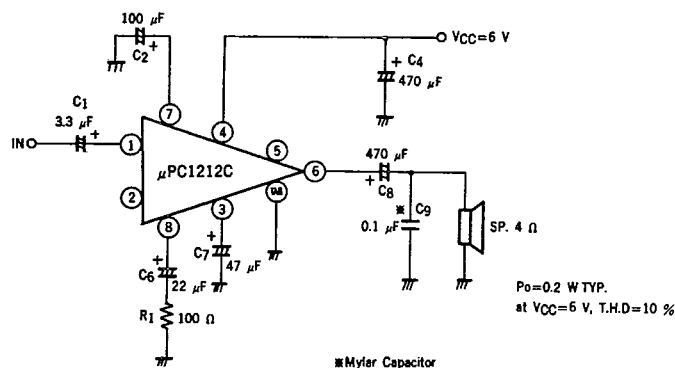

NOTE FOR USE

- (1) Capacitor C_9 is for preventing the parasitic oscillation. A mylar capacitor is recommended for this position.
- (2) The ground side of C_4 , C_9 and the loud speaker should be attached at the place of the copper foil close to the tab of μ PC1212C.
- (3) Interference noise rejection in a strong electric field can be achieved by adding a capacitor (about 1 000 pF) between pin 1 and pin 2.

μPC1212C


6427525 N E C ELECTRONICS INC

05E 22682 D

T-74-05-01

APPLICATION INFORMATION

Fig. 5 LOW COST FM-AM RADIO WITH 1.0W OUTPUT POWER (V_{CC}=6 V)

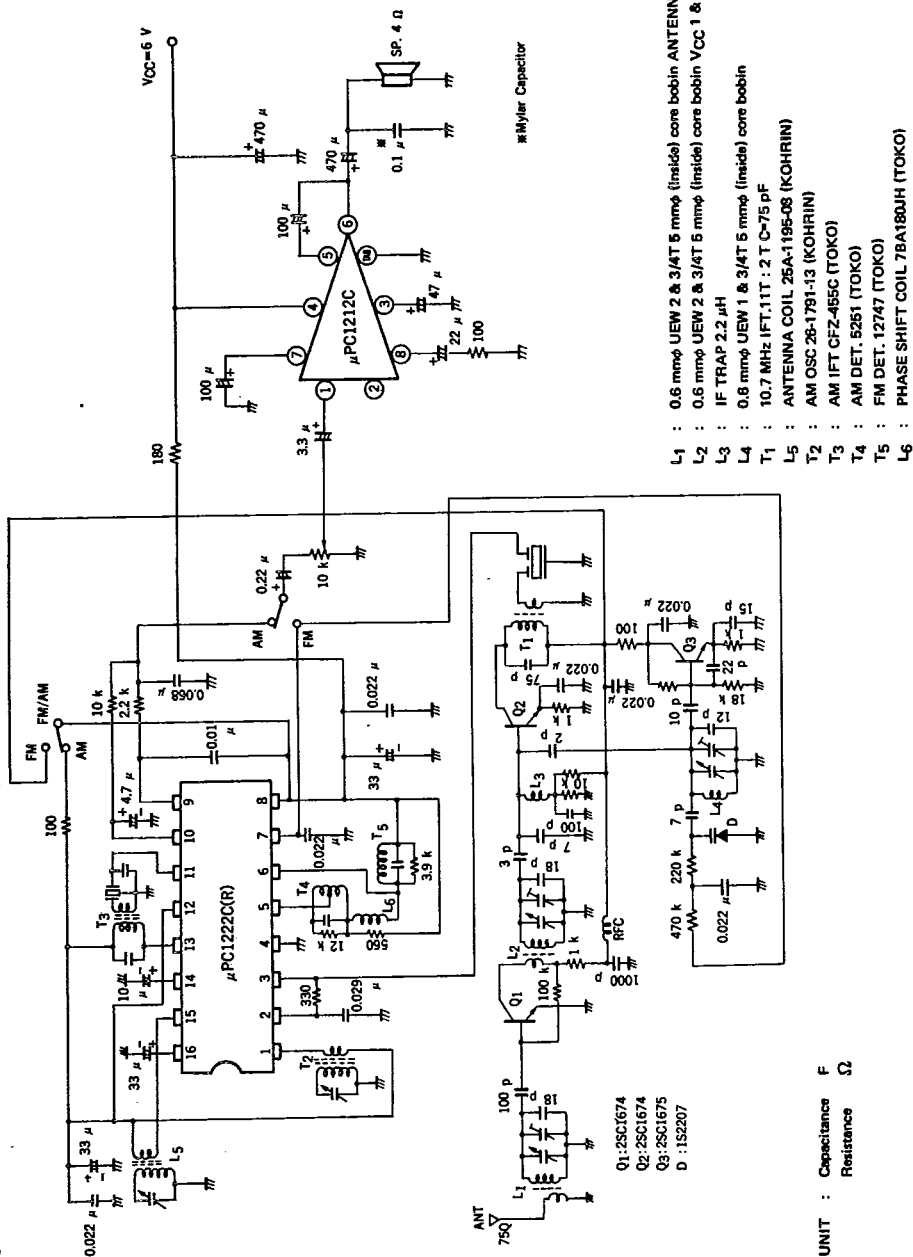


UNIT : Capacitance F
Resistance Ω

6427525 N E C ELECTRONICS INC

P.C. BOARD PATTERN (COPPER SIDE)

μ PC1212C
05E 22683 D

T-74-05-01

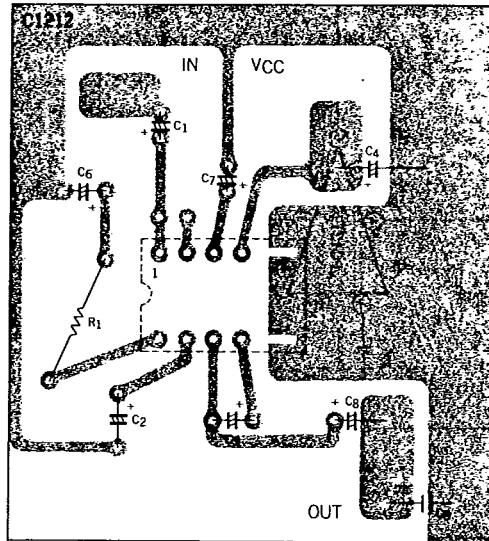

μ PC1212C
6427525 N E C ELECTRONICS INC

05E 22684 D

T-74-05-01

TYPICAL CHARACTERISTICS ($T_a = 25^\circ\text{C}$)

Fig. 6 OUTPUT POWER vs. SUPPLY VOLTAGE

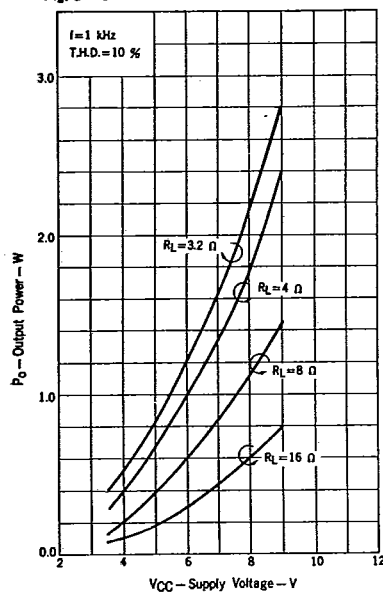


Fig. 7 TOTAL HARMONIC DISTORTION vs. OUTPUT POWER


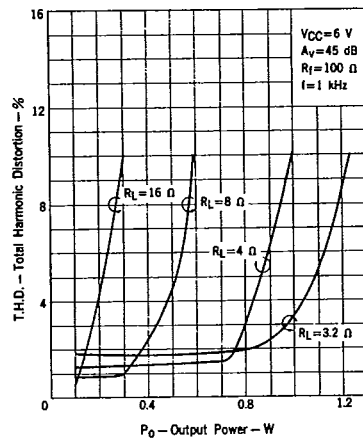


Fig. 8 POWER DISSIPATION AND EFFICIENCY vs. OUTPUT POWER

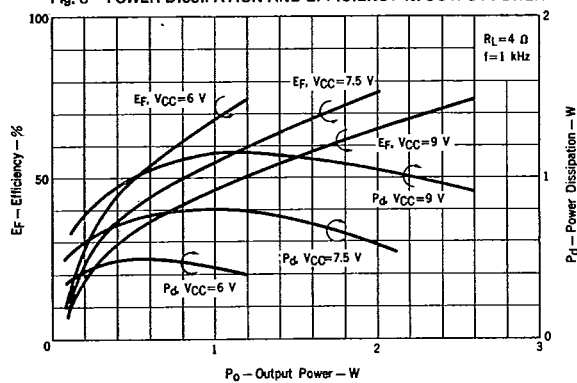

6427525 N E C ELECTRONICS INC

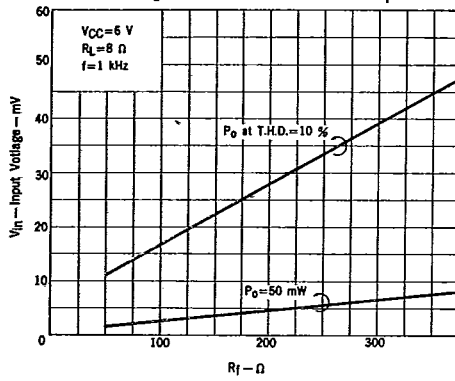
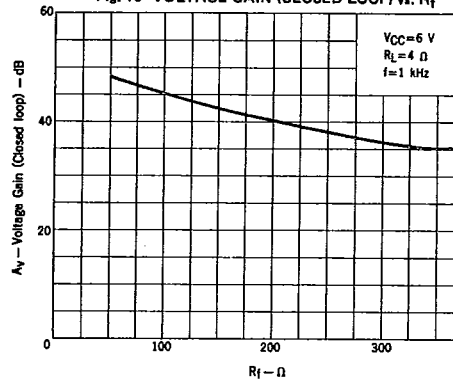
 μ PC1212C
05E 22685 D
T-74-05-01Fig. 9 INPUT SENSITIVITY vs. R_f Fig. 10 VOLTAGE GAIN (CLOSED LOOP) vs. R_f 

Fig. 11 QUIESCENT OUTPUT VOLTAGE AT PIN 6 vs. SUPPLY VOLTAGE


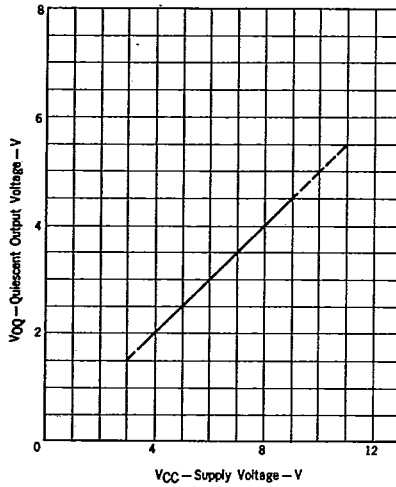


Fig. 12 QUIESCENT CIRCUIT CURRENT vs. SUPPLY VOLTAGE

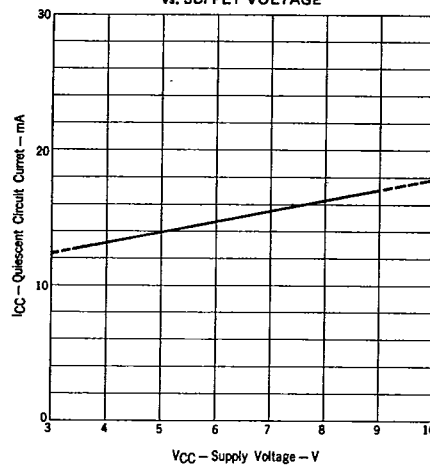

μ PC1212C

6427525 N E C ELECTRONICS INC

05E 22686 D

T-74-05-01

Fig. 13 OPEN LOOP VOLTAGE GAIN, VOLTAGE GAIN vs. FREQUENCY

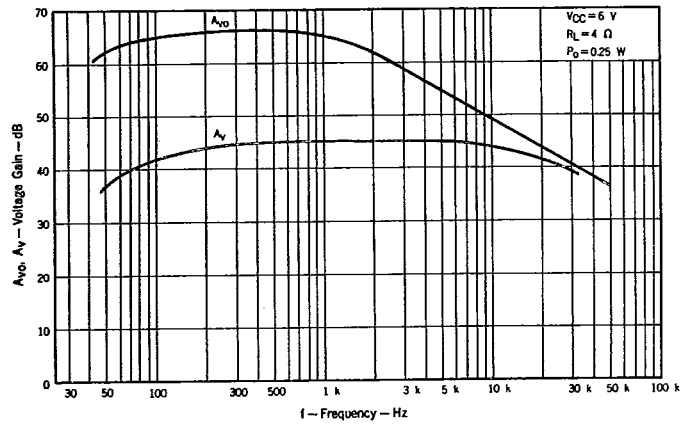


Fig. 14 TOTAL HARMONIC DISTORTION vs. FREQUENCY


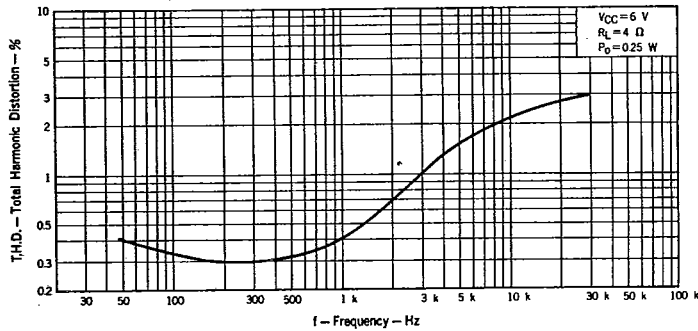


Fig. 15 THERMAL CHARACTERISTICS

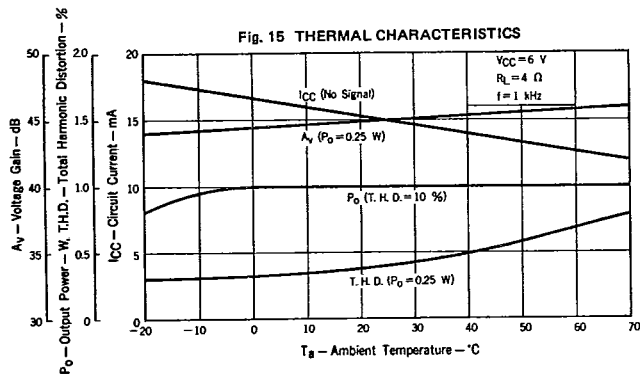

6427525 N E C ELECTRONICS INC

μ PC1212C
05E 22687 D
T-74-05-01

Fig. 16 OPEN LOOP VOLTAGE GAIN, VOLTAGE GAIN vs. SUPPLY VOLTAGE

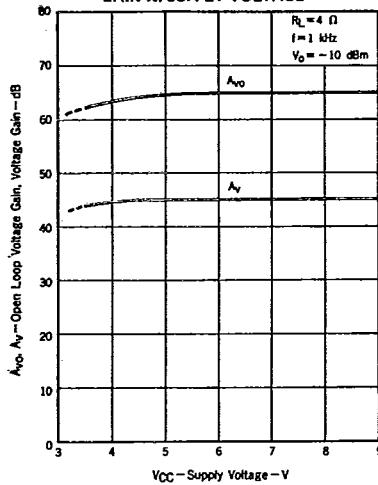


Fig. 17 TOTAL HARMONIC DISTORTION vs. SUPPLY VOLTAGE


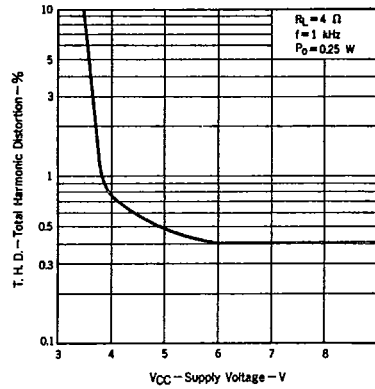


Fig. 18 AVAILABLE POWER DISSIPATION vs. AMBIENT TEMPERATURE

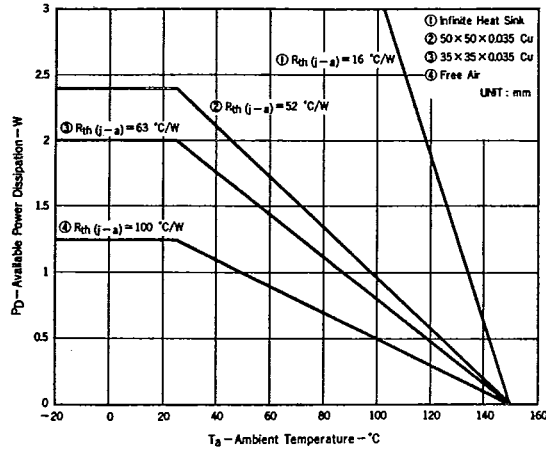

This datasheet has been downloaded from:

www.DatasheetCatalog.com

Datasheets for electronic components.