

## 4 TERMINAL LOW DROP VOLTAGE REGULATOR


The KIA78R×× Series are Low Drop Voltage Regulator suitable for various electronic equipments. It provides constant voltage power source with TO-220 4 terminal lead full molded PKG. The Regulator has multi function such as over current protection, overheat protection and ON/OFF control.

### FEATURES

- 1.0A Output Low Drop Voltage Regulator.
- Built in ON/OFF Control Terminal.
- Built in Over Current Protection, Over Heat Protection Function.

### LINE UP

ITEM	OUTPUT VOLTAGE (Typ.)	UNIT
KIA78R05API	5	V
KIA78R06API	6	
KIA78R08API	8	
KIA78R09API	9	
KIA78R10API	10	
KIA78R12API	12	
KIA78R15API	15	

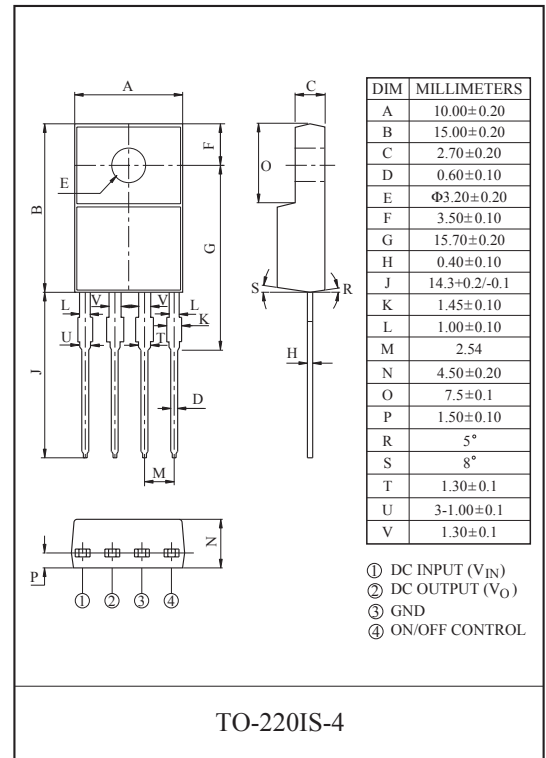

### MAXIMUM RATINGS ( $T_a=25^\circ\text{C}$ )

CHARACTERISTIC	SYMBOL	RATING	UNIT	Remark
Input Voltage	$V_{IN}$	35	V	-
ON/OFF Control Voltage	$V_C$	35	V	-
Output Current	$I_{OUT}$	1	A	-
Power Dissipation 1	$P_{D1}$	1.5	W	No heatsink
Power Dissipation 2	$P_{D2}$	15	W	with heatsink
Junction Temperature	$T_j$	125	$^\circ\text{C}$	-
Operating Temperature	$T_{opr}$	-20 ~ 80	$^\circ\text{C}$	-
Storage Temperature	$T_{stg}$	-30 ~ 125	$^\circ\text{C}$	-
Soldering Temperature (10sec)	$T_{sol}$	260	$^\circ\text{C}$	-

# KIA78R05API~KIA78R15API

## ELECTRICAL CHARACTERISTICS

(Unless otherwise specified,  $I_{OUT}=0.5A$ ,  $V_{IN}=18V$ ,  $T_a=25^{\circ}C$ , Note1.)

CHARACTERISTIC		SYMBOL	CONDITIONS	MIN.	TYP.	MAX.	UNIT
Output Voltage	KIA78R05	$V_{OUT}$	-	4.88	5.0	5.12	V
	KIA78R06		-	5.85	6.0	6.15	
	KIA78R08		-	7.80	8.0	8.2	
	KIA78R09		-	8.78	9.0	9.22	
	KIA78R10		-	9.75	10.0	10.25	
	KIA78R12		-	11.70	12.0	12.30	
	KIA78R15		-	14.70	15.0	15.30	
Load Regulation		Reg Load	$I_O=5mA \sim 1A$	-	0.1	2.0	%
Line Regulation		Reg Line	(Note2)	-	0.5	2.5	%
Ripple Rejection		$R \cdot R$	-	45	55	-	dB
Drop Out Voltage		$V_D$	(Note3)	-	-	0.5	V
Output ON state for control Voltage		$V_{C(ON)}$	-	2.0	-	-	V
Output ON state for control Current		$I_{C(ON)}$	$V_C=2.7V$	-	-	20	$\mu A$
Output OFF state for control Voltage		$V_{C(OFF)}$	-	-	-	0.8	V
Output OFF state for control Current		$I_{C(OFF)}$	$V_C=0.4V$	-	-	-0.4	mA
Quiescent Current		$I_Q$	$I_O=0$	-	-	10	mA

Note1)  $V_{IN}$  of KIA78R05=7V


- " KIA78R06=8V
- " KIA78R08=10V
- " KIA78R09=15V
- " KIA78R10=16V
- " KIA78R12=18V
- " KIA78R15=21V

Note2)  $V_{IN}$  of KIA78R05=6 ~ 12V

- " KIA78R06=7 ~ 15V
- " KIA78R08=9 ~ 25V
- " KIA78R09=10 ~ 25V
- " KIA78R10=11 ~ 26V
- " KIA78R12=13 ~ 29V
- " KIA78R15=16 ~ 32V

Note3) At  $V_{IN}=0.95V_O$

## BLOCK DIAGRAM

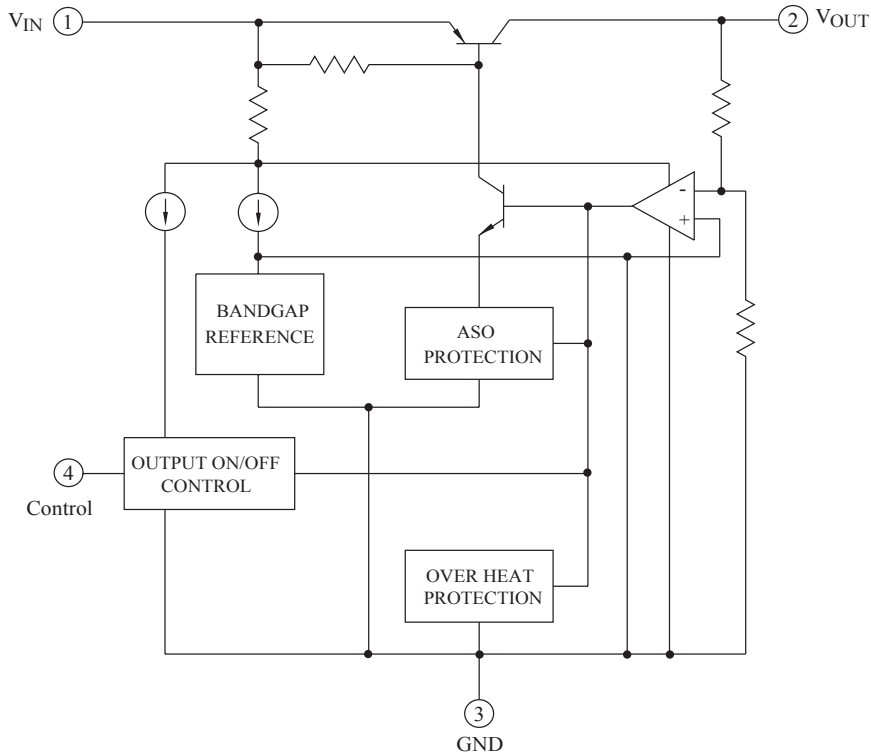

# KIA78R05API~KIA78R15API

Fig. 1 Standard Test Circuit

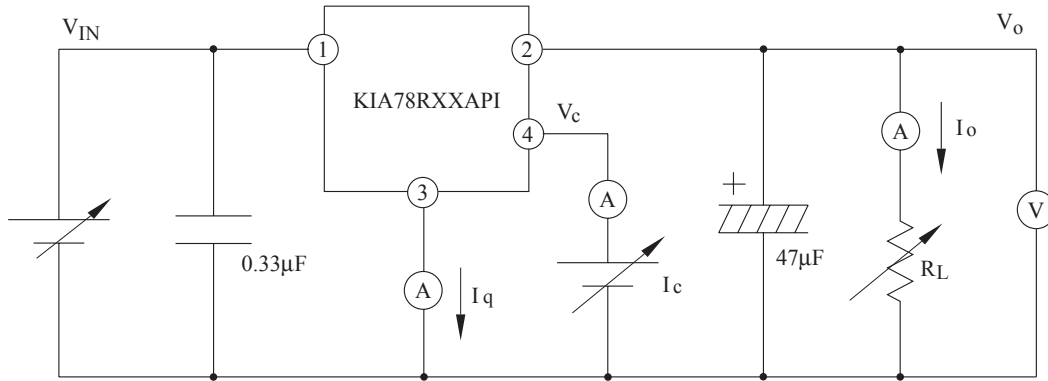


Fig. 1-2 Ripple Rejection Test Circuit



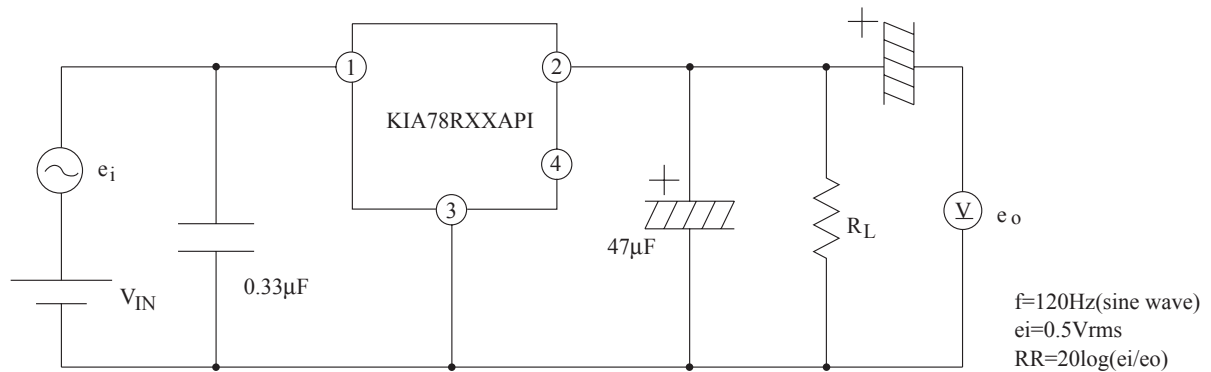


Fig. 2 Application Circuit for Standard

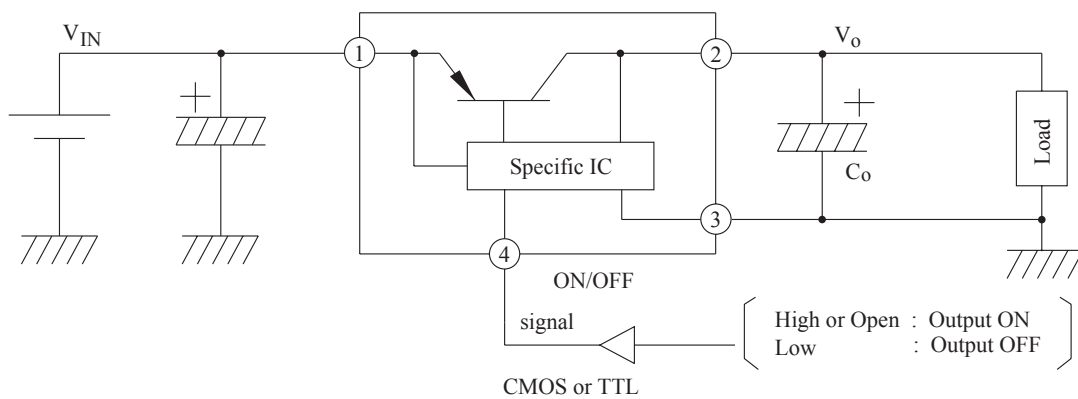

# KIA78R05API~KIA78R15API

Fig.3  $T_a - P_D$

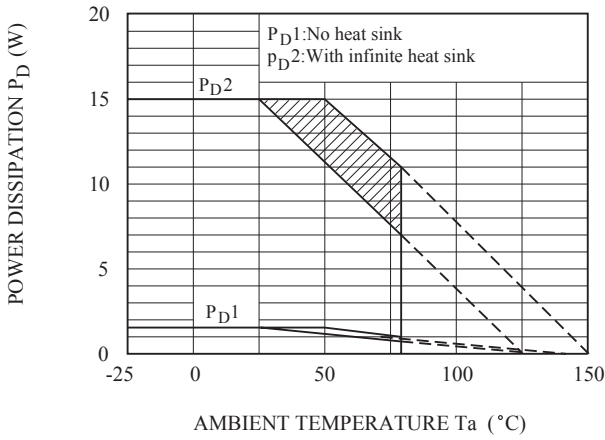

Note) Oblique line portion : Overheat protection may operate in this area.

Fig.4  $I_O - V_O$

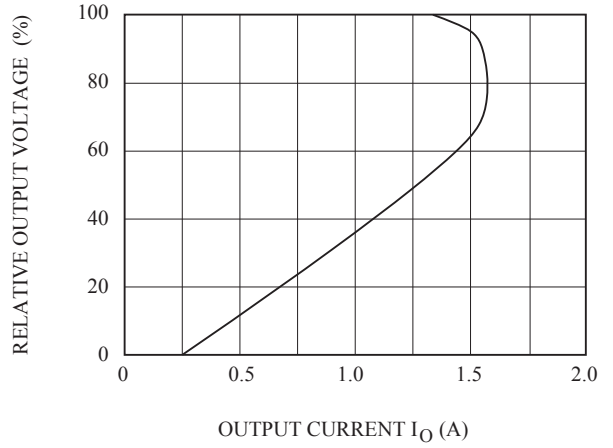


Fig.5-1  $T_j - \Delta V_O$  (KIA78R05)

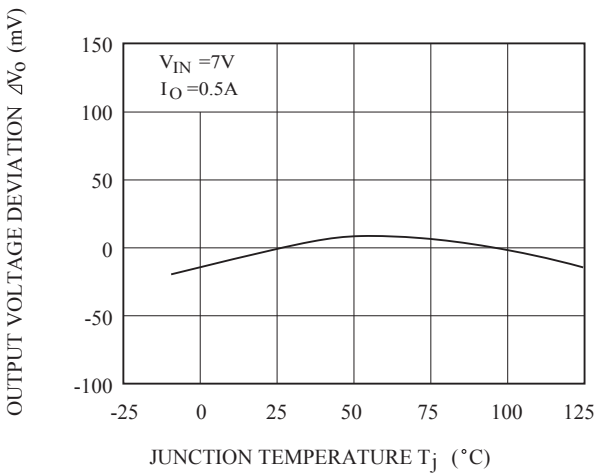


Fig.5-2  $T_j - \Delta V_O$  (KIA78R06)

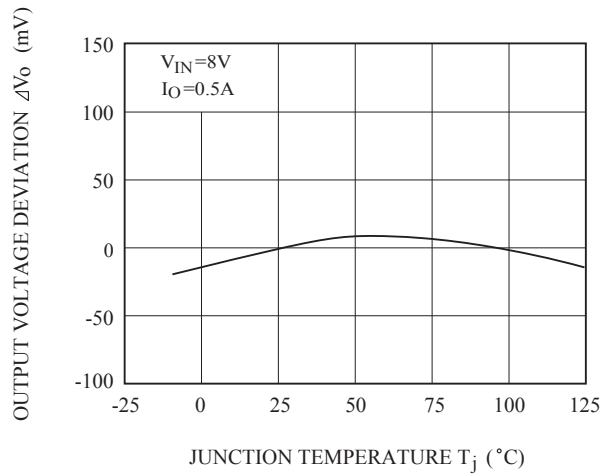


Fig.5-3  $T_j - \Delta V_O$  (KIA78R08)


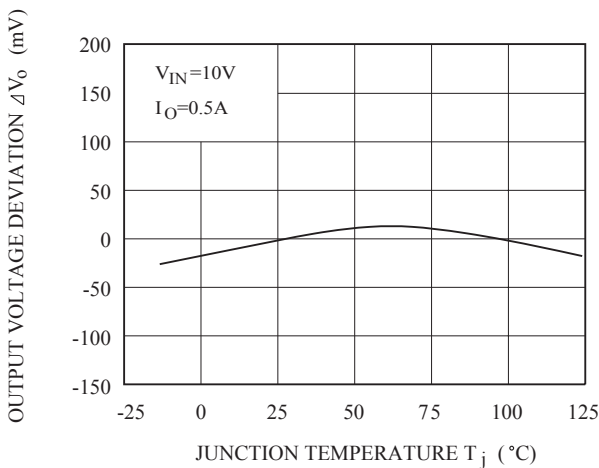


Fig.5-4  $T_j - \Delta V_O$  (KIA78R09)

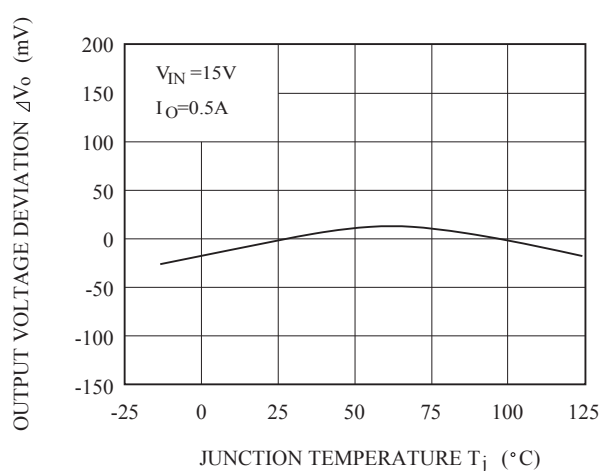

# KIA78R05API~KIA78R15API

Fig.5-5  $T_j - \Delta V_o$  (KIA78R10)

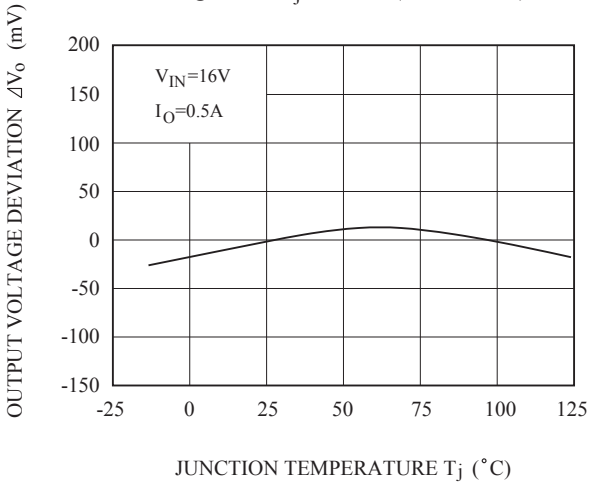


Fig.5-6  $T_j - \Delta V_o$  (KIA78R12)

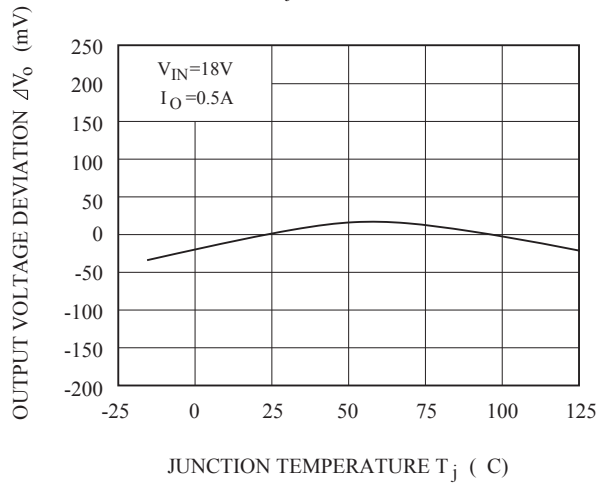


Fig.5-7  $T_j - \Delta V_o$  (KIA78R15)

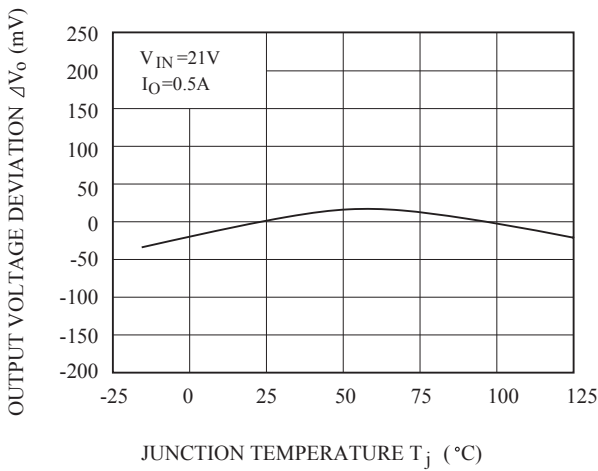


Fig.6-1  $V_{IN} - V_o$  (KIA78R05)

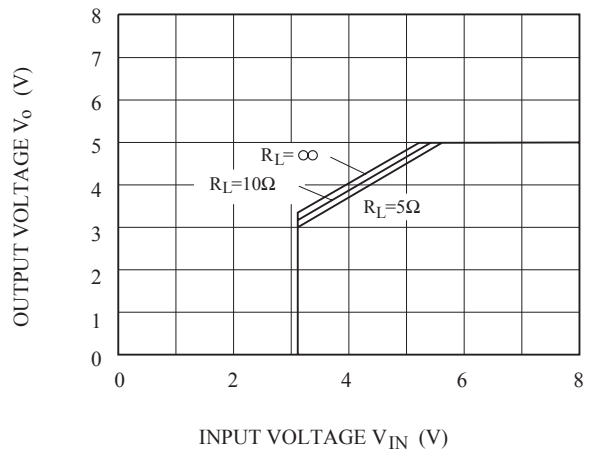


Fig.6-2  $V_{IN} - V_o$  (KIA78R06)


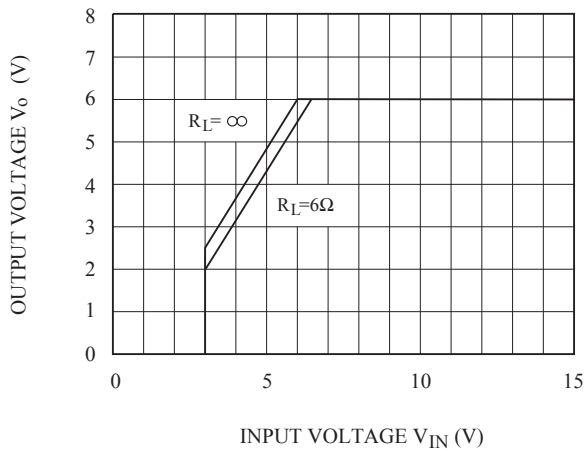


Fig.6-3  $V_{IN} - V_o$  (KIA78R08)

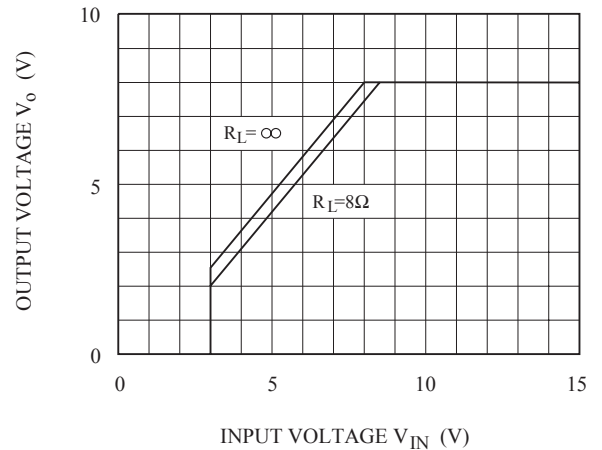

# KIA78R05API~KIA78R15API

Fig.6-4  $V_{IN} - V_o$  (KIA78R09)

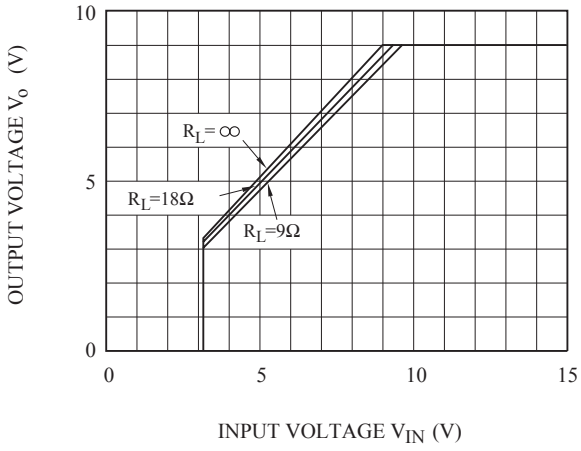


Fig.6-5  $V_{IN} - V_o$  (KIA78R10)

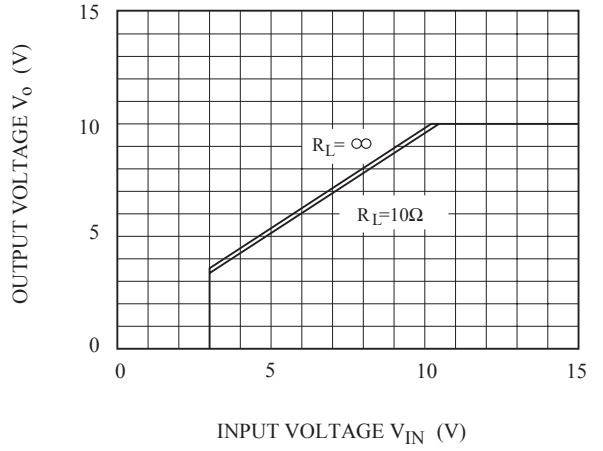


Fig.6-6  $V_{IN} - V_o$  (KIA78R12)

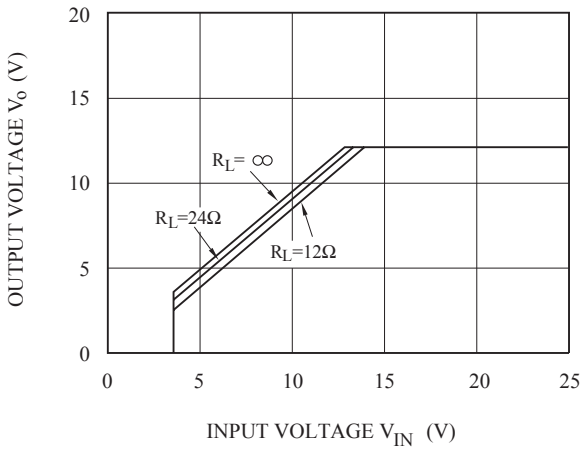


Fig.6-7  $V_{IN} - V_o$  (KIA78R15)

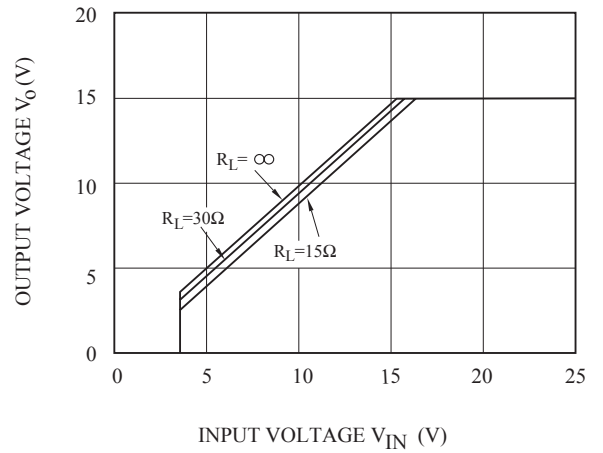


Fig.7-1  $V_{IN} - I_{BIAS}$  (KIA78R05)


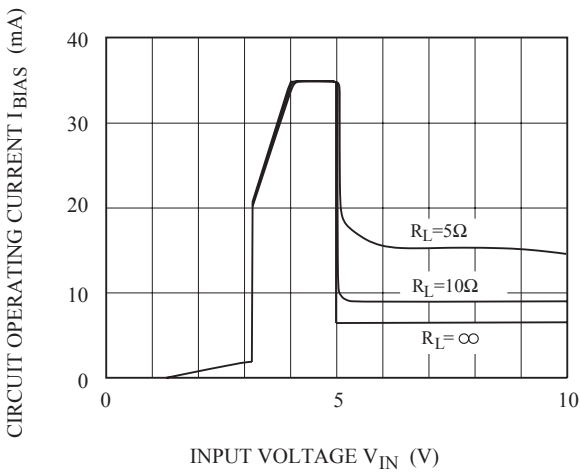


Fig.7-2  $V_{IN} - I_{BIAS}$  (KIA78R06)

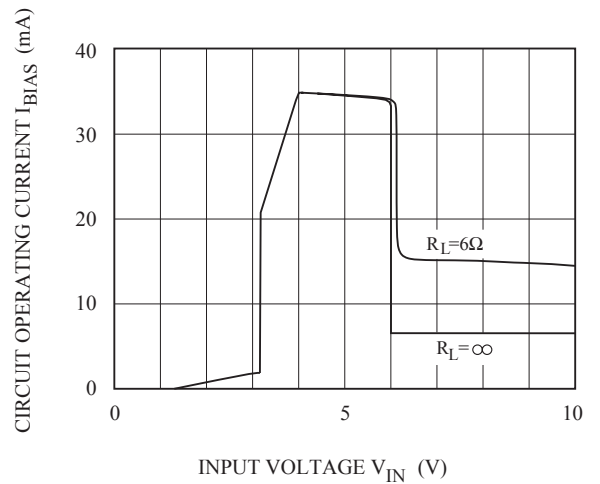

# KIA78R05API~KIA78R15API

Fig.7-3  $V_{IN} - I_{BIAS}$  (KIA78R08)

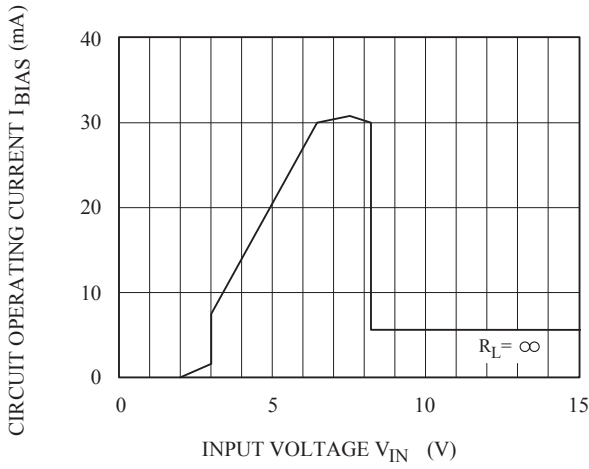


Fig.7-4  $V_{IN} - I_{BIAS}$  (KIA78R09)

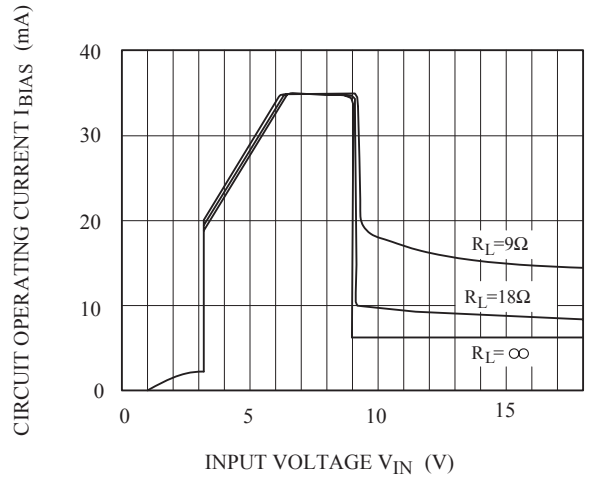


Fig.7-5  $V_{IN} - I_{BIAS}$  (KIA78R10)

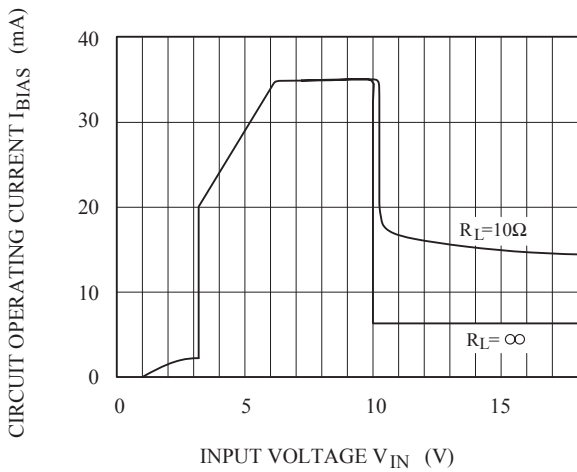


Fig.7-6  $V_{IN} - I_{BIAS}$  (KIA78R12)

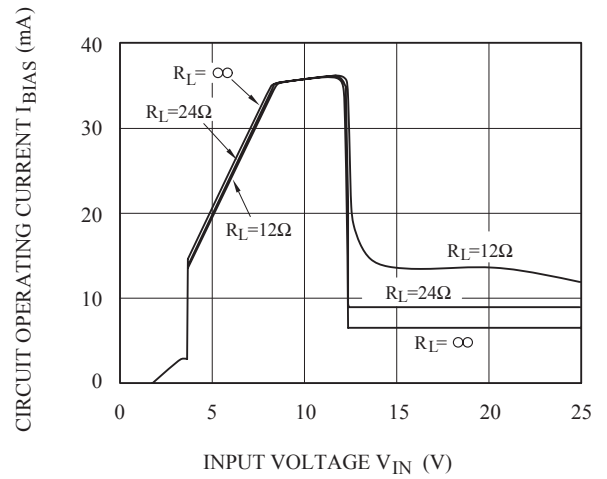


Fig.7-7  $V_{IN} - I_{BIAS}$  (KIA78R15)


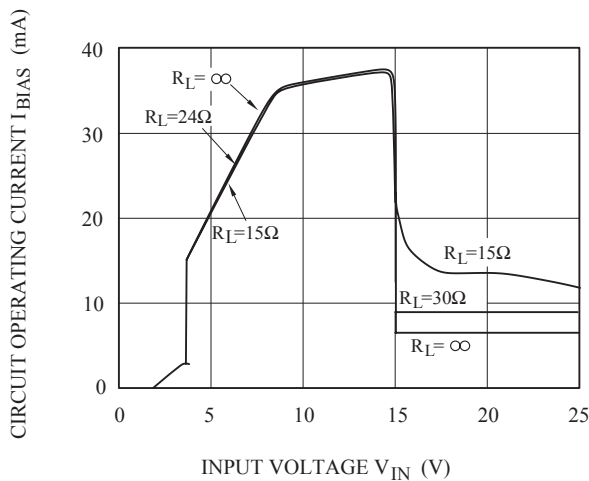


Fig.8  $T_j - V_D$

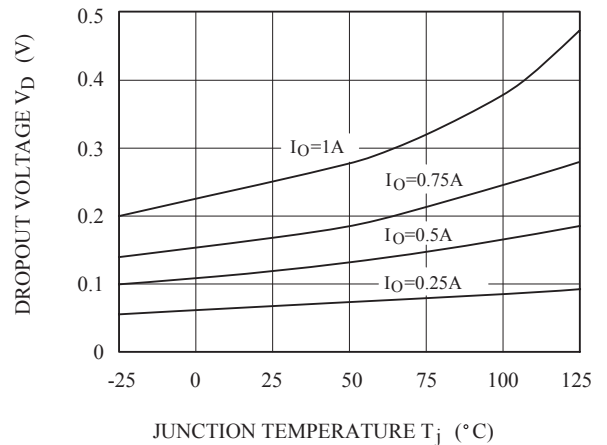

# KIA78R05API~KIA78R15API

Fig.9  $T_j - I_q$

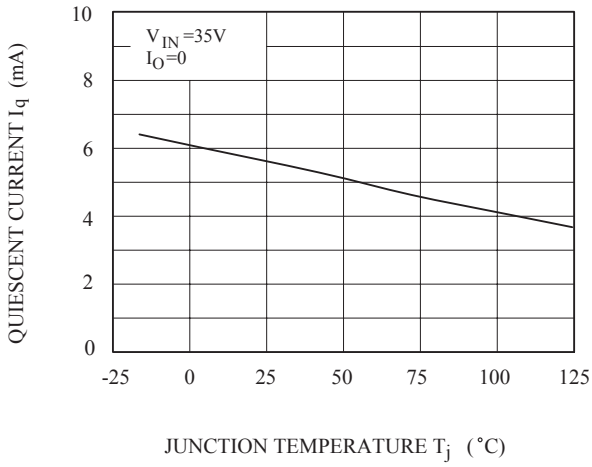


Fig. 10-1  $f - RR$

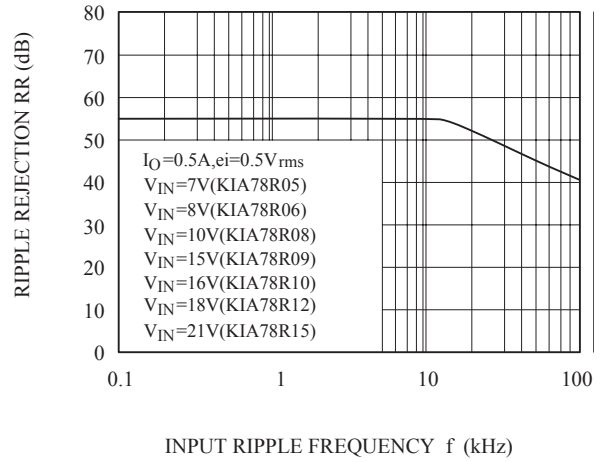


Fig.10-2  $I_O - RR$

